

Complimenting Clarke's broad extraction line by providing portable, heated, box extraction equipment, Bext® extractors are designed to be easy to use, productive, quiet, and portable all at a cost-effective price!

The Bext 100 line of equipment comes bundled with benefits and features available in our larger Bext 150 and 300 series but with a focus on light, compact and maneuverable equipment, all at a value price.

Bext® 100Hot Water Extractor

- In-line heat exchanger
- Instant heat up to 212° F
- Low moisture system at 0.8 GPM
- 100 PSI demand pump
- 3-stage vacuum motor



The Bext® 100 extractor provides portable, heated, box extraction equipment.



A Portable Extractor With Onboard Heat

Bext 100 and 100 H

Improved Dry Time

- Low moisture system, 0.8 gpm
- Faster evaporation with higher temperature (Bext 100H heated unit only)
- 5.7 inch 3-stage vacuum motor

Increased Cleaning Effectiveness

- Heated models produce up to 212° F water at tip
- Pump pressure 100 PSI demand pump, no priming necessary

Portable Cleaning

- Easy to load and transport
- Usage in buildings with multi-story/surface
- Performance alternative for maintenance cleaning
- Safety no long hoses no open doors

Deep Cleaning

- Heat increases effectiveness up to 40%
- High pressure injection increases agitation
- Bext is a carpet restorative system



A small, light-weight foot print and velcro cord wrap give you easy maneuverability. Large nonmarking wheels, easy-lift handles and positive lock tank latches make transport easy and safe.




Easily extract large or confined carpeted areas such as stairs or tight office spaces. Optional hand tool makes cleaning partitions, fabrics and upholstery a snap.






Lighted rocker switches with sealed switch plate and switches

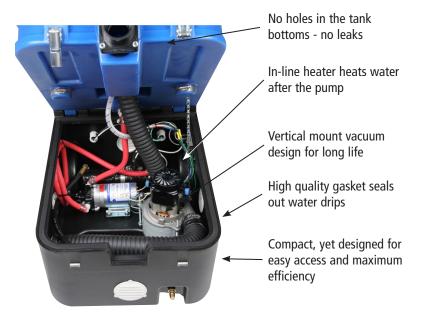

The Bext 100H Offers Onboard Heat!

Increasing solution temperature to 212°F at the spray tip dramatically improves cleaning results.

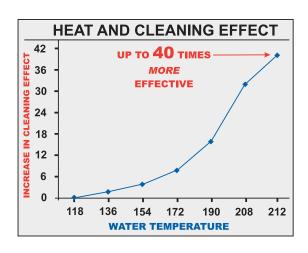



SPECIFICATIONS	Bext 100	Bext 100H	Bext 100H Detailer
Part Number	04156A	04157A	04158A
Solution Tank	9 gal rotationally molded		
Solution Pump	100 PSI demand pump		
Vacuum Motor	5.7 in 3-stage		
Water Lift	140 in		
Easy Circuit Locator	N/A	Standard	
On-Board Heater	N/A	Standard	
Wand	Double bend twin nozzle, polished stainless steel 3.5 in detail to		3.5 in detail tool
Power Cable	25 ft 12-3 ga, hospital grade plug	ft 12-3 ga, hospital grade plug (2) 25 ft 12-3 ga, hospital grade plug	
Wheels	(2) 8 in non-marking		
Hose	15 ft crush-proof vacuum and high pressure solution line		
Low Moisture System	Standard		
Float Shut-Off	Standard		
Weight	69 lb	75 lb	
Warranty	Product Lifetime (10 Years) on tank and mainframe, Parts & Labor - 1 Year		

Specifications are subject to change without notice.

What makes it easy to use?

- Easy circuit locator
- Low moisture faster dry times and no overwetting
- Compact and light weight easily transported

What enhances its productivity?

- Instant heat up to 212° F at wand tip effectiveness
- In-line heat exchanger heats water after pump

What adds to its durability?

- 5.7 inch industrial 3-stage vacuum motor
- Rotationally molded tanks
- Vertical mounted vacuum intake
- Onboard heater
- Sealed switches and switch plate

What are the safety features?

- Reduced body strain and stress
- Easy circuit locator prevents overload

- No open unsecured doors required
- Hospital grade plugs

What are the accessories?

- Upholstery tools
- Bext Chat attachment

14600 21st Avenue North • Plymouth, MN 55447-3408 Phone: 800.253.0367 • Fax: 800.825.2753

240 Superior Boulevard • Mississauga, Ontario, Canada L5T 2L2

Phone: 800.668.8400 • Fax: 800.263.5111



©2009 Nilfisk-Advance, Inc. All rights reserved. P/N 71253A 7/09



A Nilfisk-Advance Brand www.clarkeus.com